

NVR202E Series Network Video Recorder



NVR202E Series


Key Features

- 8/16/32-channel input
- Third-party IP cameras supported with ONVIF conformance
- HDMI and VGA output up to 1080P
- Accurate retrieval, instant playback
- 2 SATA HDDs up to 12 TB
- Support for P2P, UPnP, NTP, DHCP, PPPoE
- Support for mobile client access


Specifications

	NVR202-08E	NVR202-16E	NVR202-32E
Video and Audio			
IP Video Input:	8-ch	16-ch	32-ch
Two-way audio input:	1-ch,RCA		
Network			
Incoming bandwidth:	64Mbps	128Mbps	200Mbps
Outgoing bandwidth:	96Mbps		
Remote connection:	16		
Video/Audio Output			
HDMI/VGA output:	HDMI/VGA: 1920*1080P/60HZ,1920*1080P/50HZ,1600*1200/60HZ,1280*1024/60HZ,1280*720/60HZ,1024*768/60HZ		
Recording Resolution:	6MP@25、4MP@30、3MP@30、1080P@30、720P@30	8MP@25、6MP@25、4MP@30、3MP@30、1080P@30、720P@30	
Audio Output:	1-ch,RCA		
Synchronous Playback:	8-ch	16-ch	
Decoding			
Live view/ Playback:	6MP@25、4MP@30、3MP@30、1080P@30、720P@30	8MP@25、6MP@25、4MP@30、3MP@30、1080P@30、720P@30	
Capability:	9 x 720P@25, 4 x 1080P@25, 2 x 4MP@25, 1 x 4MP@30, 1 x 6MP@25	32 x D1@25, 16 x 720P@25,6 x 1080P@25, 3 x 4MP@25, 2 x 4MP@30, 2 x 6MP@25, 1 x 8MP@25	
Hard Disk			
SATA:	2 SATA interface		
Capacity:	Up to 6TB for each disk		
External Interface			
Network Interface:	1 RJ-45 10M/100M/1000M adaptive Ethernet Interface		
USB Interface:	1 x USB2.0, 1 x USB3.0		
General			
Power Supply:	12 VDC, 2A		
Consumption(without hard disk):	≤6 W (without hard disk)		
Working Temperature:	-10°C ~ + 55°C (+14°F ~ +131°F)		
Working Humidity:	10% ~ 90%		
Dimensions:	360.0 × 254.3 × 43.6 mm (14.17" × 10.01" × 1.72")		
Weight(without HDD):	≤1.42KG		

Dimensions

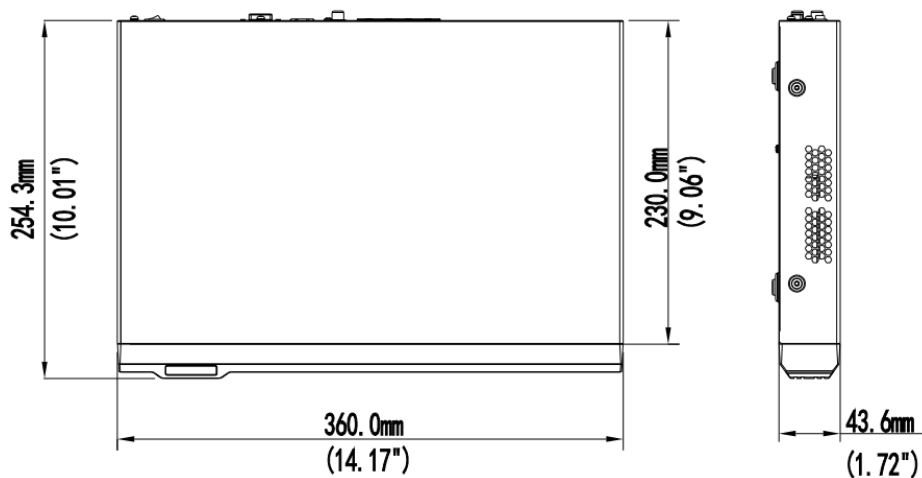

Rear Panel

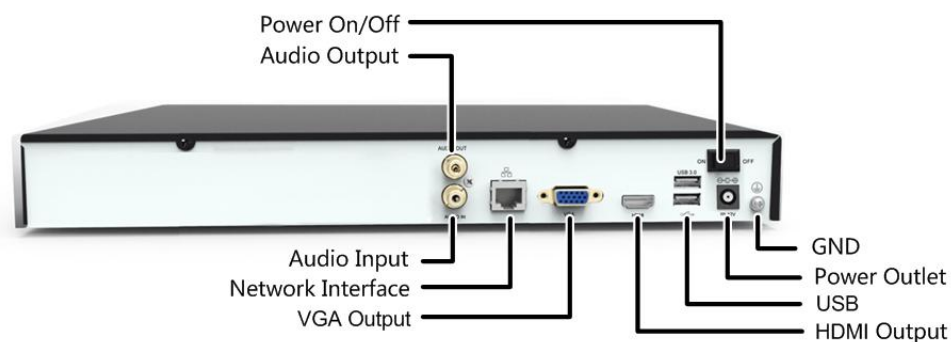

Zhejiang Uniview Technologies Co., Ltd.

South Tower, Building 10, Wanlun Science Park, 88 Jiangling Road, Hangzhou, P.R.China 310051

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2015 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.